



Scan
to request
this service

+34 91 498 71 00

transgruma@transgruma.com



Add us
to your contacts

Crane-Mounted Tractor Unit PK 65 JIB

The Palfinger **PK 65002 JIB** crane-mounted tractor unit stands out for its outstanding reliability. Efficiency is increased with the JIB thanks to DPS Plus, while precision and safety are guaranteed by the optional AOS. Lifting capacity is exceptional, allowing the crane to be used even in tight spaces thanks to the HPSC. Find details of truck crane hire with operator below.

Horizontal reach

18 m

Horizontal reach with JIB

32.6 m

Maximum lifting capacity

13.4 t

Outrigger spread



8.6 m




Technical specifications

Crane	6+6 main boom + JIB sections	7+6 main boom + JIB sections
Horizontal reach	18 m	15.7 m
Horizontal reach with JIB	30 m	32.6 m
Vertical reach	20 m	22 m
Vertical reach with JIB	34 m	36 m
Maximum lifting capacity	13,400 kg	12,900 kg
Max. capacity at JIB tip	700 kg	390 kg
Slewing range	360°	360°
Truck		
Length	7,640 mm	7,640 mm
Width	2,550 mm	2,550 mm
Weight (total unladen)	22,865 kg	22,865 kg


Machine Dimensions

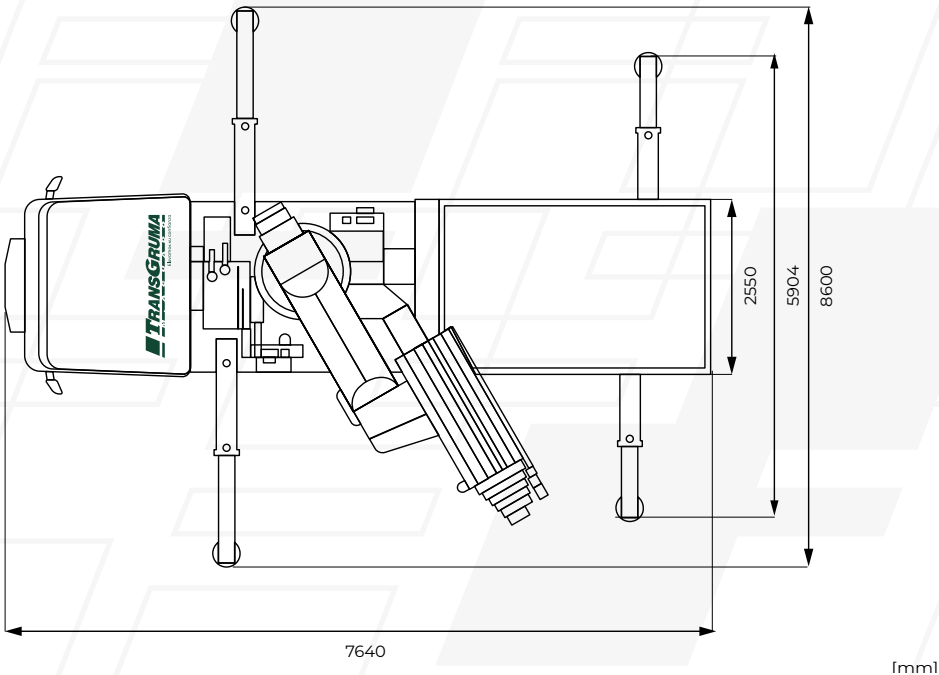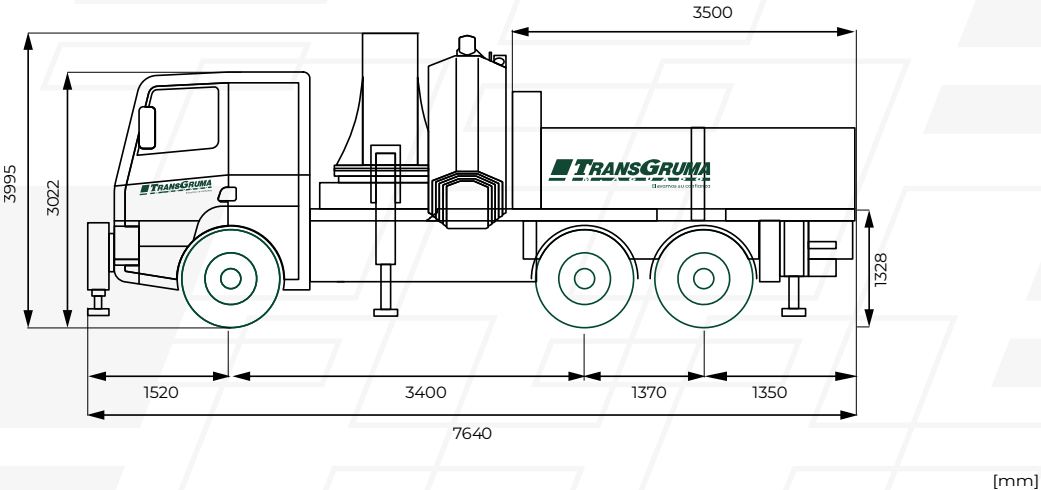


Load diagram 6 extensions

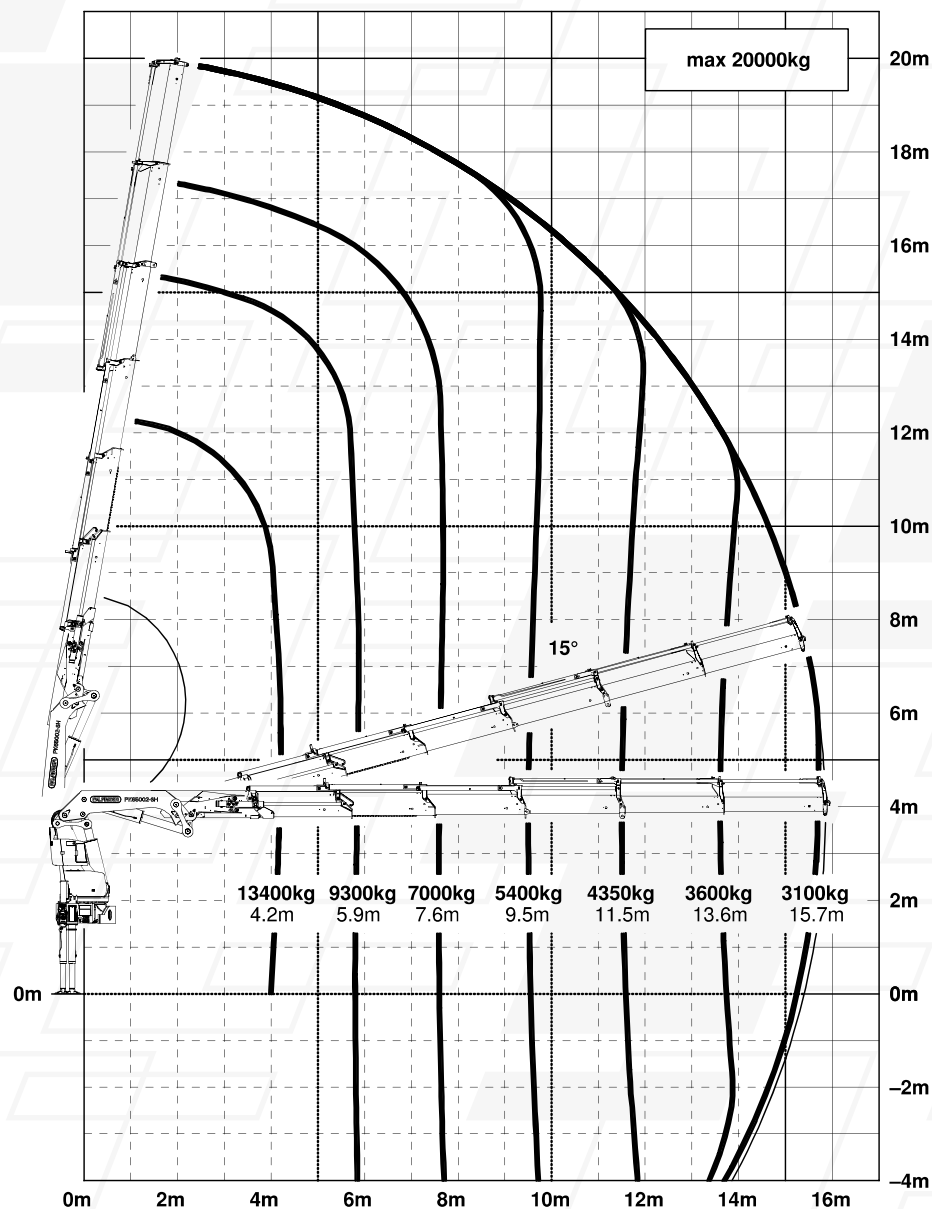


Load diagram with JIB 6+6

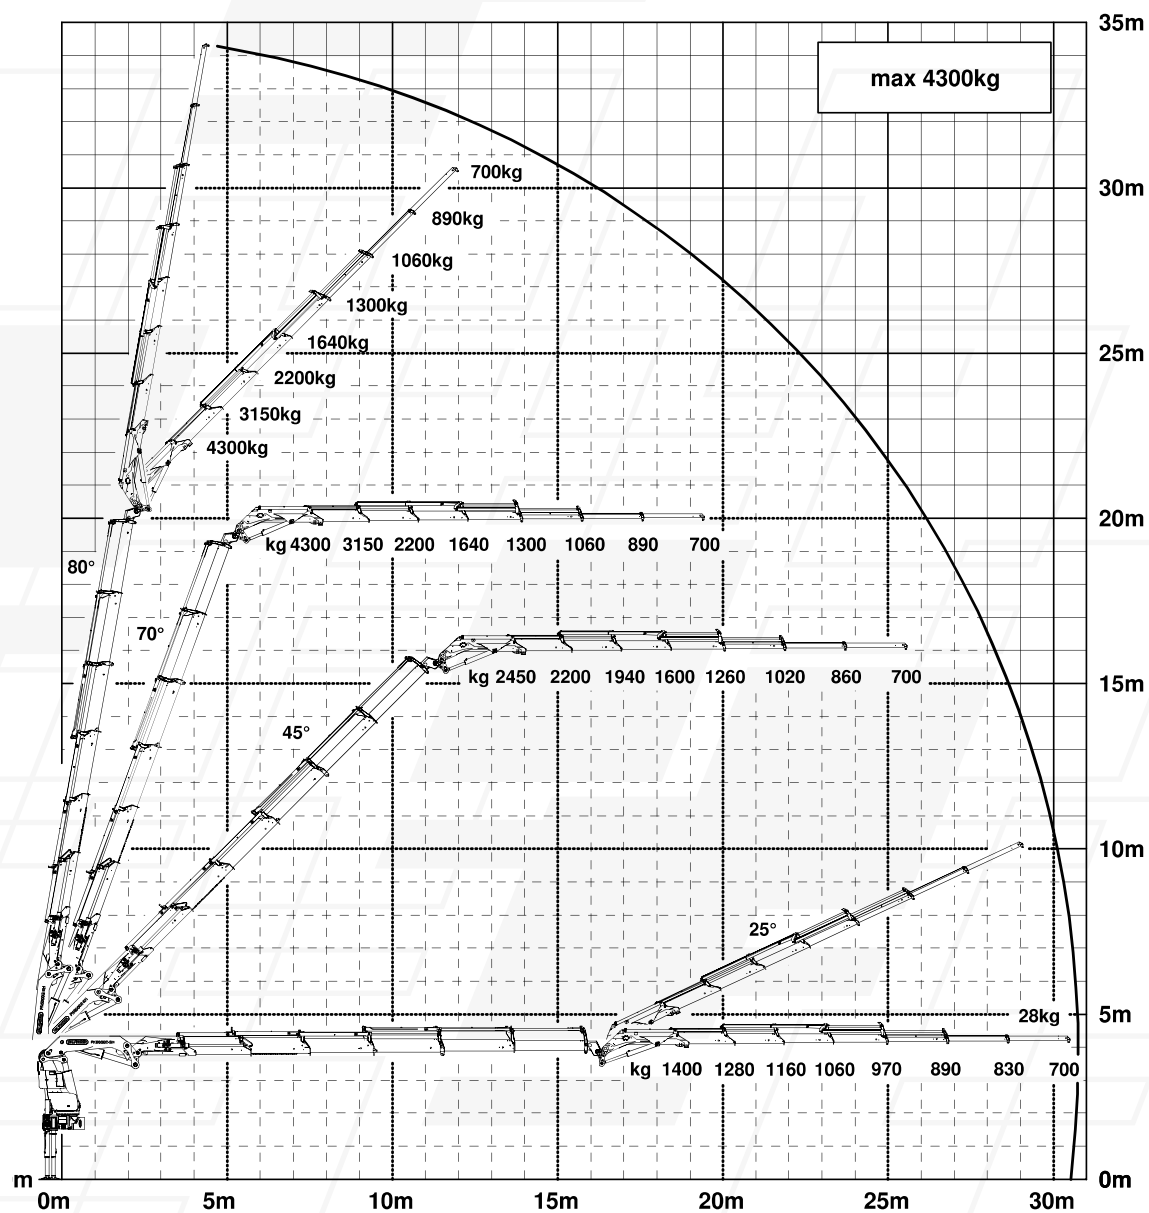

Load diagram 7 extensions

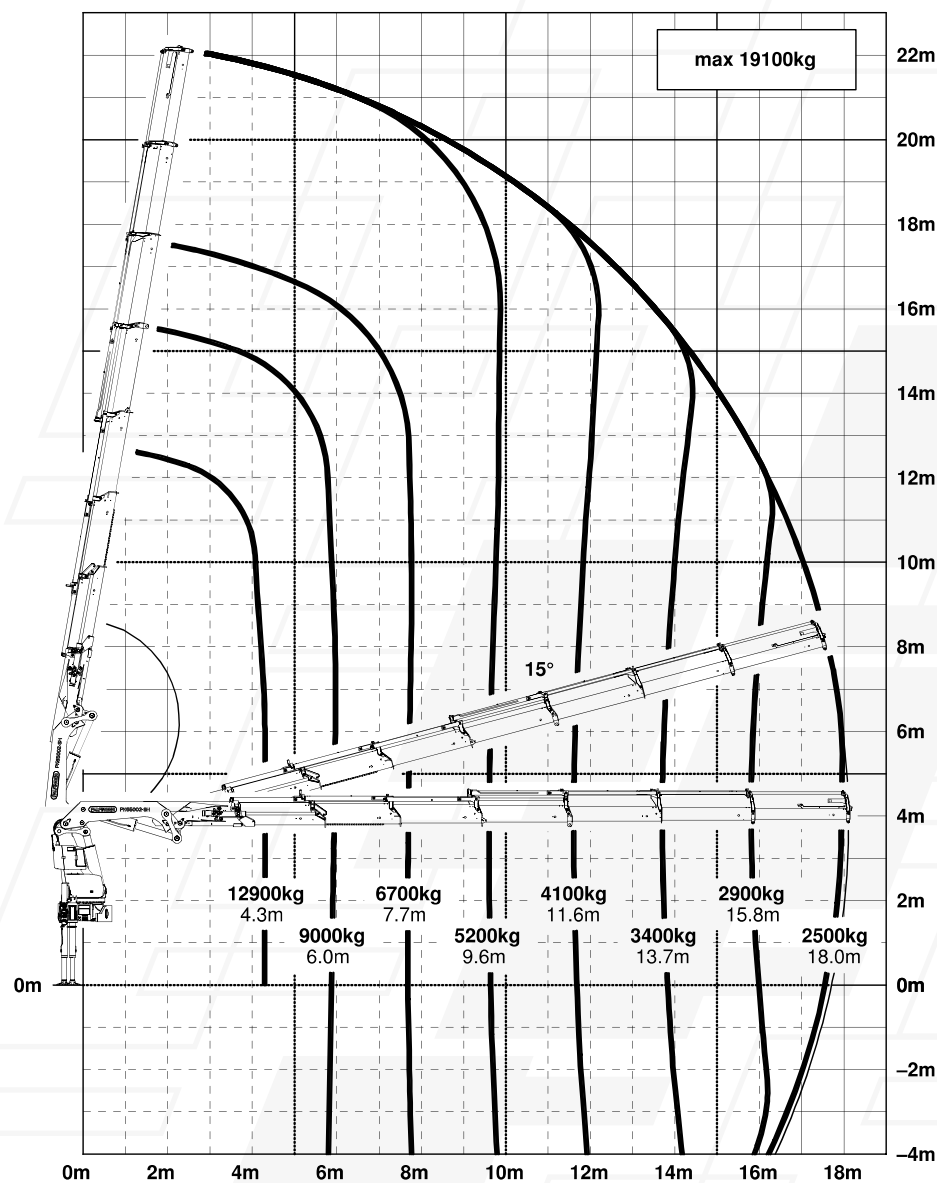

Load diagram with JIB 7+6

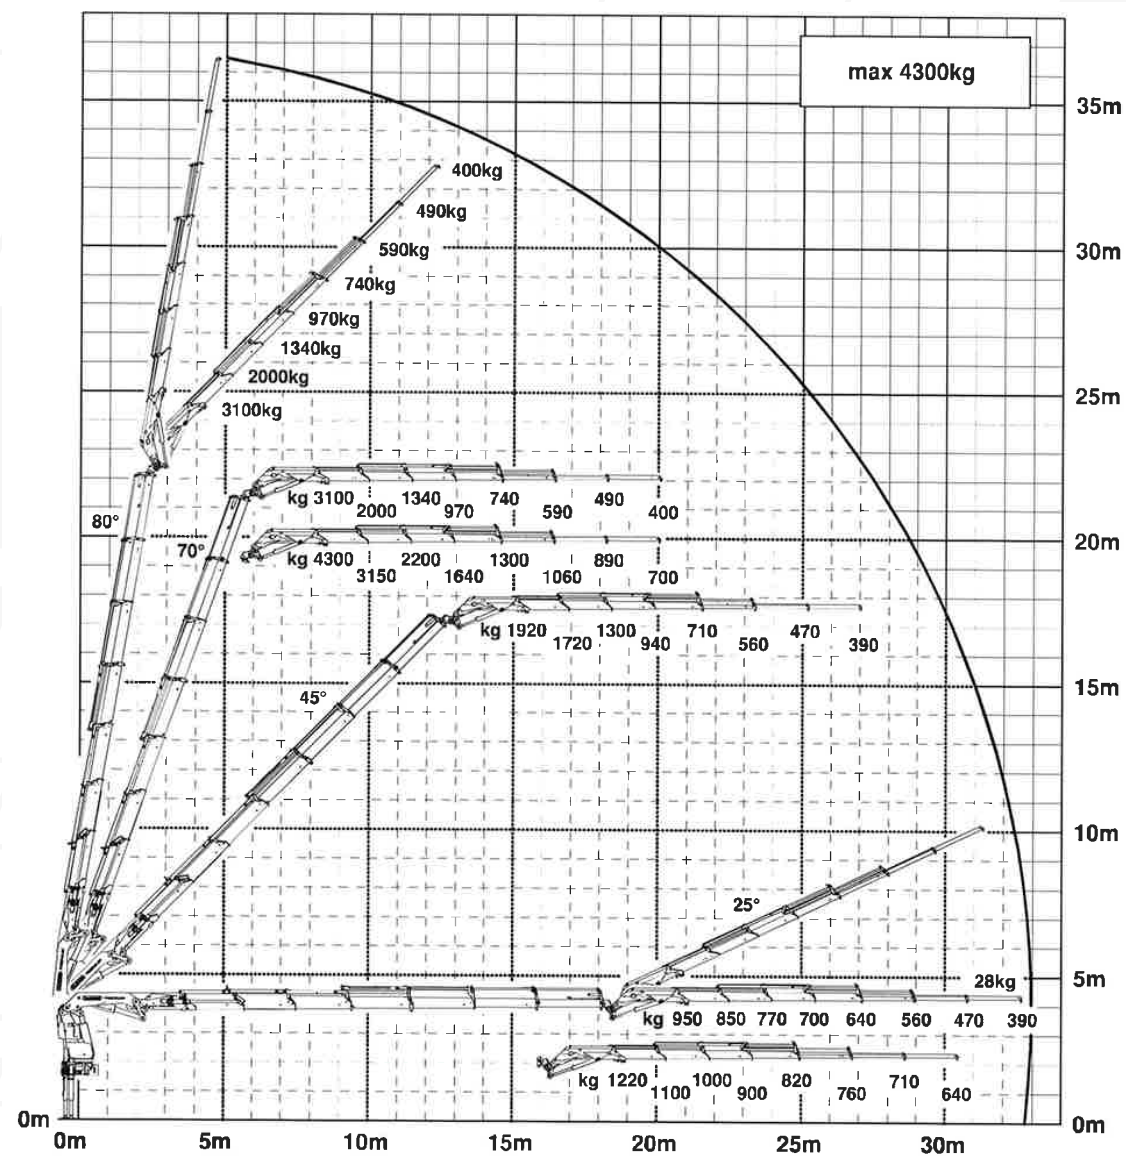

Superior quality in design and performance



Winch

4.5-tonne winch on the articulated boom and a 3.5-tonne winch on the main boom.




Extension system

Greater rigidity and lower weight thanks to the use of high-strength fine-grain structural steels.




Power Link Plus

Articulated boom with 15° over-extension, able to reach through low doorways and work inside buildings.

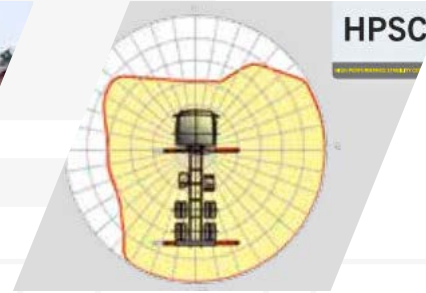

HPSC

(High Performance Stability Control System). Variable outrigger positioning makes the most of the lifting power.

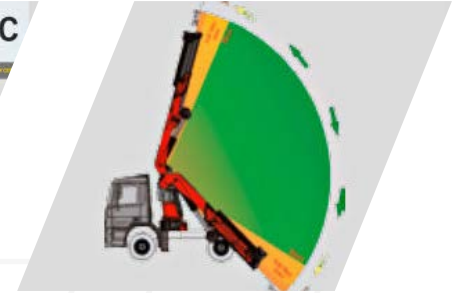

Soft Stop function

Electronic end-position damper that provides smooth braking, preventing abrupt movements and impacts on the load.



Contact us
We are ready to handle
your request