



Scan  
to request  
this service

+34 91 498 71 00

transgruma@transgruma.com



Add us  
to your contacts

# Tractor unit PK53 JIB

The PK 53 JIB stands out for its ease of use and sensitive handling, which makes it ideal for delicate operations. It offers greater comfort and safety thanks to its progressive stop system. It maximises use of the working area with HPSC technology and improves lifting capacity with the S-HPLS system. Its continuous slewing increases efficiency and operating speed.

***Maximum use of the working area through HPSC technology***

***Greater lifting power through S-HPLS technology***

***A more efficient and faster slewing system***

***Stability control***

Horizontal reach

**19.0 m**

Horizontal reach with JIB

**32.5 m**

Maximum capacity

**10 t**

Outrigger spread

**7.8 m**





# Technical specifications


| Crane                     | Value     |
|---------------------------|-----------|
| Horizontal reach          | 19.0 m    |
| Horizontal reach with JIB | 32.5 m    |
| Vertical reach            | 22.8 m    |
| Vertical reach with JIB   | 36 m      |
| Maximum lifting capacity  | 10,000 kg |
| Max. capacity at JIB tip  | 940 kg    |
| Slewing range             | 360°      |
| Truck                     |           |
| Overall width             | 2.55 m    |
| Length                    | 7.82 m    |
| Number of axles           | 3         |
| Max. weight per axle      | 10 t      |
| Tractor unit weight       | 21,715 kg |



# Machine Dimensions

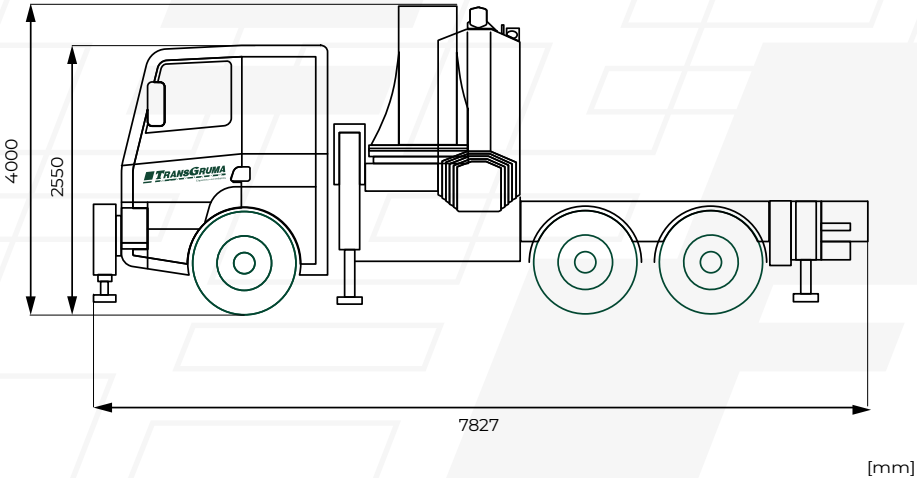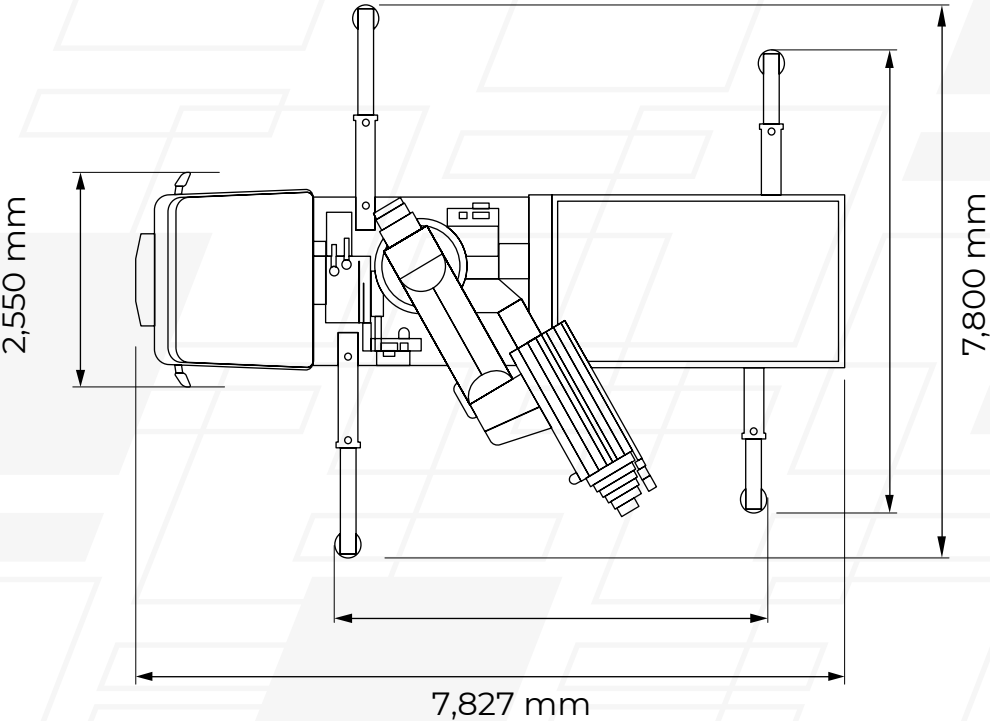

Load diagram

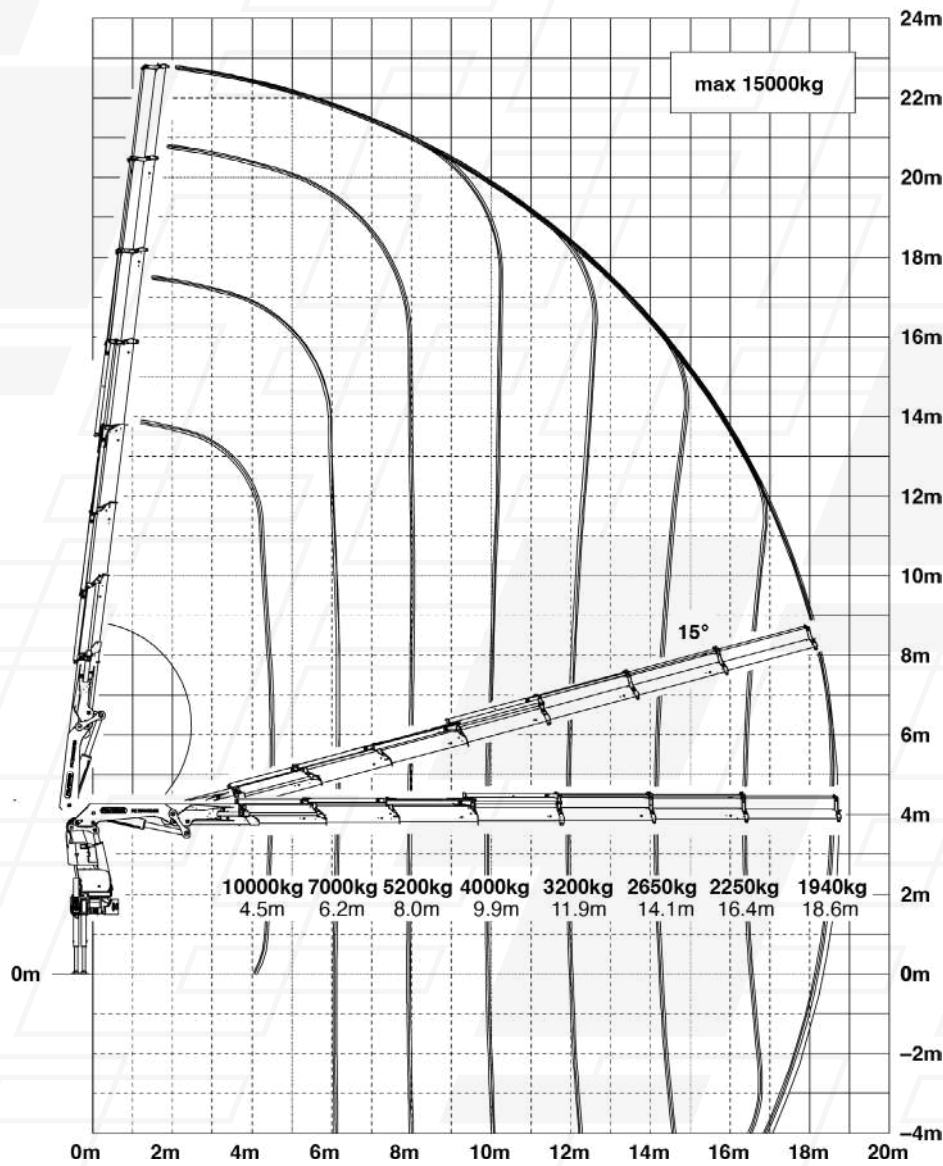

Load diagram with JIB

